



3" 13H PLASTIC NUT T-40782

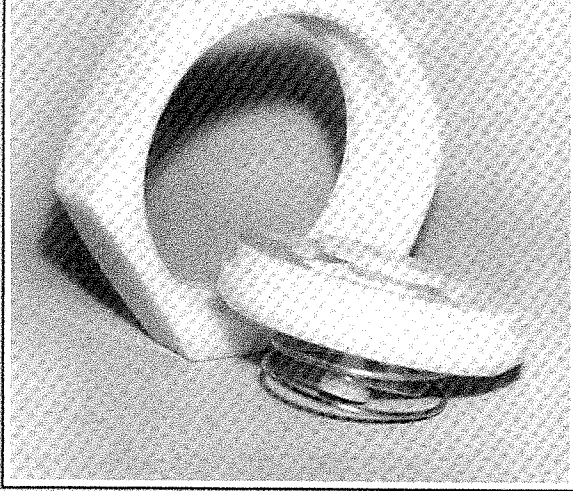


## CERTIFIED DOUBLE ACTING OLSON VENT T-21642

These double acting, anti-splash, sanitary transport vents have been scientifically designed and thoroughly tested. They are far superior, in venting capabilities, to any other device available for sanitary tanks. However, they are **not** intended to be a substitute for the necessary and safe practice of opening the manhole cover before loading or unloading.

### *THE TRANSPORT VENT WILL:*

1. Limit vacuum during pump out at 300 GPM to less than  $\frac{3}{4}$  psig.
2. Limit air or vapor pressure to 5 psig.
3. Prevent spill during surge.
4. Prevent fluid leakage on inclines.

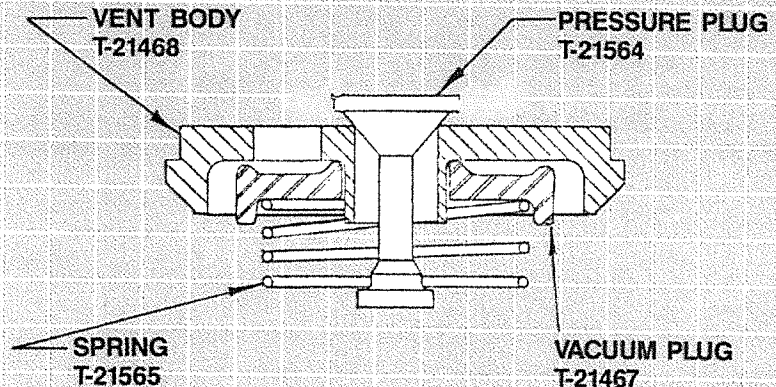

### **WARNING!**

VENT WILL NOT OPERATE UNDER ANY OF THE FOLLOWING CONDITIONS:

1. WHEN INCORRECTLY ASSEMBLED! (See Sketch Provided)
2. WHEN STUCK DUE TO IMPROPER CLEANING!
3. WHEN FROZEN!
4. WHEN USED IN CONJUNCTION WITH INADEQUATE DUST COVER VENT!

**NON-WARRANTY:** The facts stated and the recommendations made here in are based on our own research and/or the research of others, and are believed to be accurate. No guarantee of their accuracy is made, however, and unless otherwise expressly provided in written contract, the products discussed are sold without conditions or warranties, expressed or implied. Purchasers should make their own tests to determine the suitability of such products for their particular purposes. Nothing contained herein shall be construed to be a recommendation to use or as a license to operate under or to infringe any existing patents.

Distributed By